



QBL150 Series

July 2017

Quick Release Bonding Lead Solutions

The QBL150 quick release bonding lead provides an effective hand-releasable method of earth bonding electrical equipment. They are particularly useful for applications where a temporary connection is required when equipment needs to be removed quickly over multiple times.

QBL bonding leads comprise of a flat tin-plated copper braid with a crimped ring terminal at one end and a BNC or TNC connector at the other. Connection to equipment is via a mating receptacle, mounted on the equipment being earthed.

Operating Temperature


- Tin-plated Cu: -55°C to +120°
- Insulated: -55°C to +120°



Fast and Easy Release BNC or TNC Connector Various Lengths

Rear and Front Mounted Mating Receptacle



QBL150-B-50-A-S

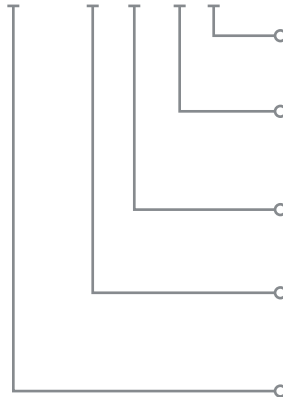

Part Numbering example

- Insulated:**
Leave blank if insulation not required
- Terminal Code Reference:**
A M3 (5mm hole)
B M4 (6.73mm hole)
- Standard Lengths:**
Min. 50mm and above in 25mm increments
- Connector Code Reference:**
B BNC (bayonet)
T TNC (threaded)
- Part Reference:**
QBL150 Tin plated copper
Also available as Nickel plated copper, without insulation for higher operating temperatures.

Standard Configurations

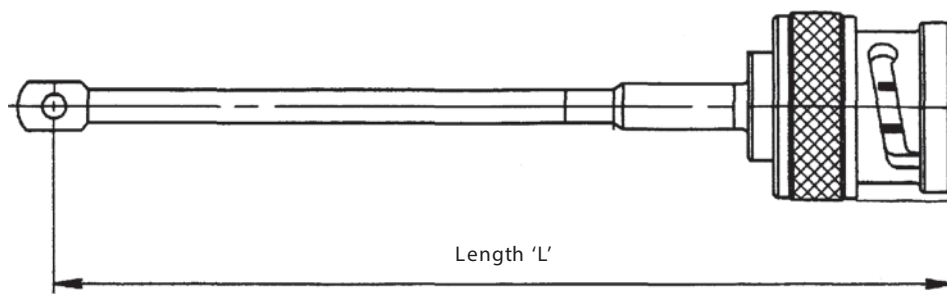

Front mounted
receptacle

QBL150B - BNC Type

Connector	BNC, MIL-C-39012 B (class 2, category c)
Braid	2.64mm ² , Tin plated copper
Current rating	36 amps (for 60 seconds)
Operating temperature	-55°C to +120°C
Insulation	PAN6480K04
Front panel mounting receptacle	QBL150-BF
Rear panel mounting receptacle	QBL150-BR
Ring terminal hole diameter	5mm or 6.73mm

Nominal	Bonding Lead Length with Terminals						
	50mm	75mm	100mm	125mm	150mm	175mm	200mm
Mass (g) 5.0mm hole	-	26.5	27.0	27.5	28.2	28.5	29.5
Mass (g) 6.0mm hole	-	26.9	27.4	27.9	28.6	28.9	29.9
Resistance (mΩ)	0.4	0.6	0.8	1.0	1.2	1.4	1.6

QBL150T - TNC Type

Connector	TNC, PAN6444A
Braid	2.64mm ² , Tin plated copper
Current rating	36 amps (for 60 seconds)
Operating temperature	-55°C to +120°C
Insulation	PAN6480K04
Front panel mounting receptacle	QBL150-TF
Ring terminal hole diameter	5mm or 6.73mm

Nominal	Bonding Lead Length with Terminals						
	50mm	75mm	100mm	125mm	150mm	175mm	200mm
Mass (g) 5.0mm hole	26.0	26.5	27.0	27.5	28.2	28.8	29.5
Mass (g) 6.0mm hole	26.4	26.9	27.4	27.9	28.6	29.2	29.9
Resistance (mΩ)	0.4	0.6	0.8	1.0	1.2	1.4	1.6

All information provided is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. IS-Rayfast give no guarantee in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages from the sale, resale, transfer, use or misuse of the product.

+44(0)1934 424900 • sales@is-cabletec.com

www.is-cabletec.com

Sunnyside Road, Weston-Super-Mare, North Somerset BS23 3PZ, UK

